

X2-MKP 为无感结构,用金属化聚丙烯膜作为电介质 / 电极卷绕而成,导线采用镀锡铜包钢线,使用环氧树脂密封在塑料壳内。

X2-MKP are non-inductively wound with metallized Polypropylene film as the dielectric/electrode with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.

特点 FEATURES

- 优异的阻燃性能, 安全性高
Excellent active and passive flame resistant abilities, high security
- 优异的抗脉冲能力
Excellent anti-pulse ability
- 绝缘电阻高,自愈性好, 寿命长
High insulation resistance long life due to self-healing effect


用途 APPLICATIONS

- 广泛用于电源跨线电路等抗干扰场合
Widely used in across-the-line, interference suppression circuit, etc.

技术要求 SPECIFICATIONS

- | | | |
|-------|------------------------|--|
| 引用标准 | Reference Standard: | GB/T14472 (IEC 60384-14), UL 60384-14 |
| 气候类别 | Climatic Category: | 40/110/56/B |
| 额定电压 | Rated Voltage: | 275VAC/300VAC/305VAC |
| 电容量范围 | Capacitance Range: | 0.001~4.7μF |
| 电容量偏差 | Capacitance Tolerance: | ±5%(J),±10%(K), ±20%(M) |
| 耐电压 | Voltage Proof: | 4.3URDC(5s) |
| 损耗角正切 | Dissipation Factor: | ≤0.2%(20℃,10KHZ) |
| 绝缘电阻 | Insulation Resistance: | CR≤0.3μF, ≥15000 MΩ
(20℃,1min) CR>0.3μF, ≥5000S |

产 品 尺 寸 DIMENSIONS

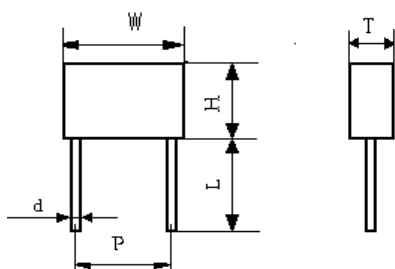



额定电压 VAC	标称容量 μF	外形尺寸(mm) Dimensions				
		W ±1	H ±1	T ±1	P ±1.0	d ±0.05
275VAC /300VAC/305VAC	0.001	10.5	9	4	7.5	0.6
	0.0012	10.5	9	4	7.5	0.6
	0.0015	10.5	9	4	7.5	0.6
	0.0018	10.5	9	4	7.5	0.6

安规认证:

NAME	BRAND
C-UL	
VDE	
ENEC	
CQC	

接 上 表



额定 电压 VAC	标称 容量 μF	外形尺寸(mm) Dimensions				
		W ±1	H ±1	T ±1	P ±1.0	d ±0.05
275VAC /300VAC/305VAC	0.0022	10.5	9	4	7.5	0.6
	0.0027	10.5	9	4	7.5	0.6
	0.0033	10.5	9	4	7.5	0.6
	0.0039	10.5	9	4	7.5	0.6
	0.0047	10.5	9	4	7.5	0.6
	0.0056	10.5	9	4	7.5	0.6
	0.0068	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
	0.0082	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
	0.01	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
		18	12	6	15	0.8
	0.012	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
		18	12	6	15	0.8
	0.015	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
		18	12	6	15	0.8
	0.018	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
		18	12	6	15	0.8
	0.022	10.5	9	4	7.5	0.6
		13	9	4	10	0.6
		17.5	9.5	5	15	0.6
	0.027	10.5	11	5	7.5	0.6
		13	9	4	10	0.6
		17.5	9.5	5	15	0.6
	0.033	10.5	11	5	7.5	0.6
		13	9	4	10	0.6
		17.5	9.5	5	15	0.6
	0.036	10.5	12	6	7.5	0.6
		13	9	4	10	0.6
		17.5	9.5	5	15	0.6
	0.039	10.5	12	6	7.5	0.6
		13	9	4	10	0.6
		17.5	9.5	5	15	0.6
	0.047	10.5	12	6	7.5	0.6
		13	11	5	10	0.6
		17.5	9.5	5	15	0.6
	0.056	13	11	5	10	0.6
		17.5	9.5	5	15	0.6
		17.5	9.5	5	15	0.6
	0.068	13	11	5	10	0.6
		17.5	9.5	5	15	0.6
		17.5	9.5	5	15	0.6
	0.082	13	12	6	10	0.6
		17.5	9.5	5	15	0.6
		17.5	9.5	5	15	0.6
	0.1	13	12	6	10	0.8
		17.5	9.5	5	15	0.6



具体尺寸和技术参数，可按客户要求协商确定。Special requirements can be designed at the request of customers.

接 上 表


额定 电压 VAC	标称 容量 μF	外形尺寸(mm) Dimensions				
		W ±1	H ±1	T ±1	P ±1.0	d ±0.05
275VAC /300VAC/305VAC	0.1	17.5	11	5	15	0.6
		18	12	6	15	0.6
	0.12	13	13	7	10	0.8
		17.5	11	5	15	0.6
	0.15	13	14	8	10	0.8
		17.5	11	5	15	0.6
	0.15	18	12	6	15	0.8
		26.5	15	6	22.5	0.8
		13	14	8	10	0.8
	0.18	18	12	6	15	0.8
		26.5	15	6	22.5	0.8
		13	14	8	10	0.8
	0.22	13	14	8	10	0.8
		13	16	8	10	0.8
		18	12	6	15	0.8
		18	13	7	15	0.8
		18	14.5	8.5	15	0.8
		26.5	15	6	22.5	0.8
	0.27	26.5	14.5	7	22.5	0.8
		18	13.5	7.5	15	0.8
		26.5	15	6	22.5	0.8
	0.33	18	14	8	15	0.8
		18	15.5	8	15	0.8
		26.5	15	6	22.5	0.8
	0.36	18	14.5	8.5	15	0.8
		26.5	15	6	22.5	0.8
	0.39	18	14.5	8.5	15	0.8
		26.5	15	6	22.5	0.8
	0.47	18	14.5	8.5	15	0.8
		18	16	10	15	0.8
		18	19	11	15	0.8
		18	21	12	15	0.8
		26.5	16	7	22.5	0.8
		26.5	17	8.5	22.5	0.8
		26.5	19	10	22.5	0.8
	0.56	32	18	9	27.5	0.8
		18	19	11	15	0.8
		26.5	16	7	22.5	0.8
		32	18	9	27.5	0.8
	0.68	18	19	11	15	0.8
		26.5	17	8.5	22.5	0.8
		26.5	19	10	22.5	0.8
		26.5	20	11	22.5	0.8
	0.82	32	18	9	27.5	0.8
		18	19	11	15	0.8
		18	21	12	15	0.8
		26.5	19	10	22.5	0.8
		32	18	9	27.5	0.8

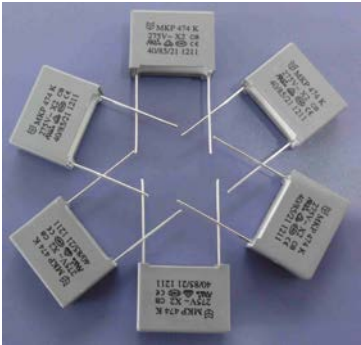

具体尺寸和技术参数，可按客户要求协商确定。Special requirements can be designed at the request of customers.

接 上 表

额定 电压 VAC	标称 容量 μF	外形尺寸(mm) Dimensions				
		W ± 1	H ± 1	T ± 1	P ± 1.0	d ± 0.05
275VAC /300VAC/305VAC	1	26.5	19	10	22.5	0.8
		26.5	20	11	22.5	0.8
		32	18	9	27.5	0.8
	1.2	26.5	22	12	22.5	0.8
		32	20	11	27.5	0.8
	1.5	26.5	22	12	22.5	0.8
		32	20	11	27.5	0.8
	1.8	26.5	24.5	15.5	22.5	0.8
		32	22	13	27.5	0.8
	2	26.5	24.5	15.5	22.5	0.8
		32	22	13	27.5	0.8
	2.2	26.5	24.5	15.5	22.5	0.8
		32	24.5	15	27.5	0.8
	2.7	32	28	17	27.5	0.8
	3.3	32	28	17	27.5	0.8
	3.6	32	29	19	27.5	0.8
	3.9	32	33	18	27.5	0.8
	4.7	32	37	22	27.5	0.8

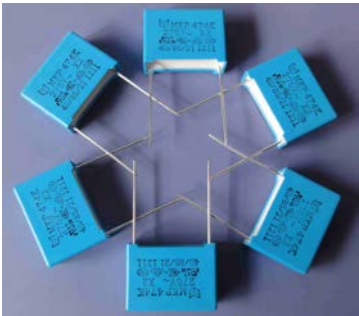

具体尺寸和技术参数，可按客户要求协商确定。Special requirements can be designed at the request of customers.